


# 57000 SERIES SIZE 23 LINEAR STEPPER ACTUATOR

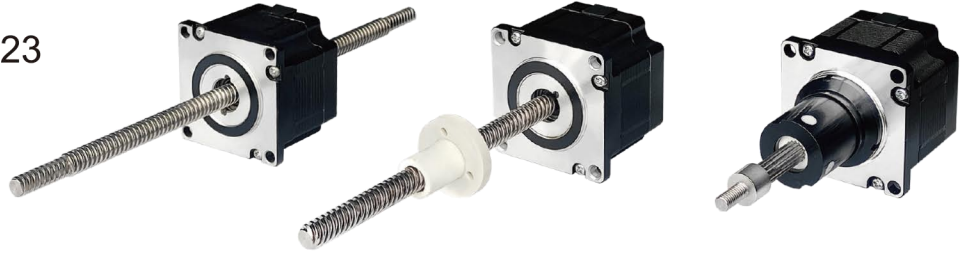


Size11:28mm Hybrid Linear Stepper Motor(1.8°Step Angle)											
Captive	Non-captive	External Lin.	Wiring	Rated voltage	Rated current	Resistance /phase	Inductance /phase	Power consumption	Temperature rise	Weight	Insulation resistance
57CA4(X)-V	57NA4(X)-V	57EA4(X)-V	Bipolar	3.25V	2A	1.63Ω	3.5mH	13W	75°C	511g	20MΩ
				5V	1.3A	3.85Ω	10.5mH				
				12V	0.54A	22.2Ω	57mH				

Code	Leadscrew Thread Dimension		
	Diameter	Step	Lead
7	3/8	0.000125	0.025
9	3/8	0.00025	0.05
A	3/8	0.0003125	0.0625
S	3/8	0.0004167	0.0833
3	3/8	0.0005	0.1
T	3/8	0.000833	0.167
1	3/8	0.001	0.2
C	3/8	0.00125	0.25
MJ	3/8	0.00187	0.375
2	3/8	0.002	0.4
Y	3/8	0.0025	0.5
Z	3/8	0.005	1


( Units:Inches)

## Force vs.Pulse Rate


Chopper drive : motor 3.25V and power supply 24V

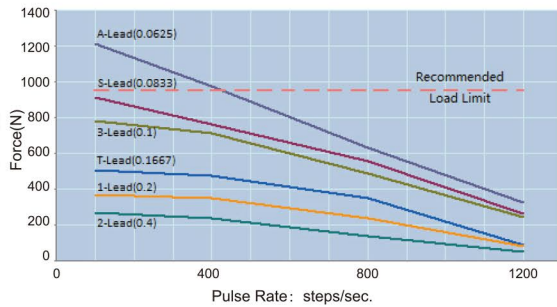

## Captive

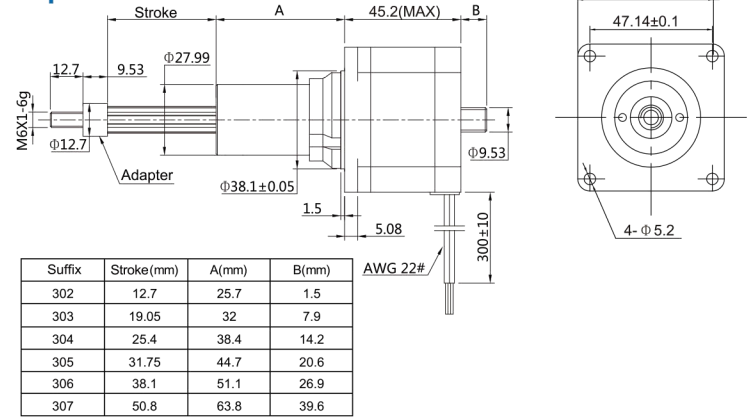

## Non-Captive

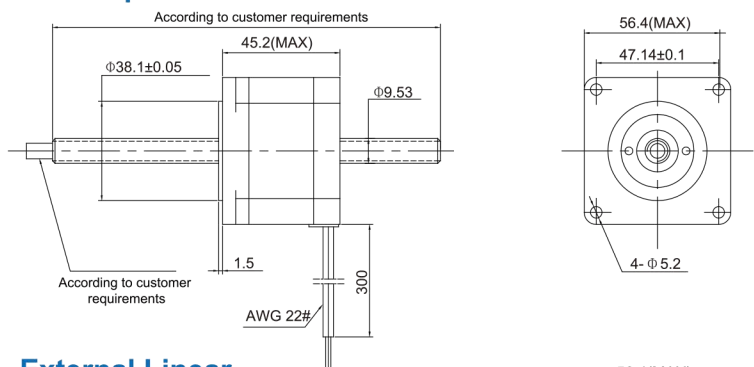

## External Linear

